

FACTORY RECOVERY SERVICE

MONEY SAVING FACTS

THE MOST IMPORTANT FACT IS, IF YOU HAVE SEWN-END ELEMENTS, THEY CAN BE REPAIRED AT A FRACTION OF THE COST BY USING OUR FACTORY RECOVERY SERVICE.

ODOLLINGER®




FACT: Our Factory Recovery Centers, have reconditioned hundreds of types of sewn-end filter elements with a wide range of specially formulated filter media. This means that virtually any sewn-end filter element can be recovered at a fraction of the cost of buying new.

FACT: Celeros FT Factory Recovery Service is prompt, reliable and cost–effective. In fact, many elements can be recovered in only one day, if necessary.

FACT: Celeros FT pioneered Dollinger's filter element recovery as a way of helping our customers save money. Our Factory Recovery Service restores your sewn-end element to like new condition at just a fraction of the original new cost. This not only saves you money but it also helps protect the Dollinger filter housing warranty.

FACT: We also offer our Factory Recovery Service for other brands of sewn-end elements. So even if you now have a Dollinger "look alike" element, you can upgrade your element by taking advantage of Celeros FT's expert factory service.

FACT: By taking advantage of the Celeros FT Factory Recovery Service, your used or worn element will be expertly reconditioned, just like new!

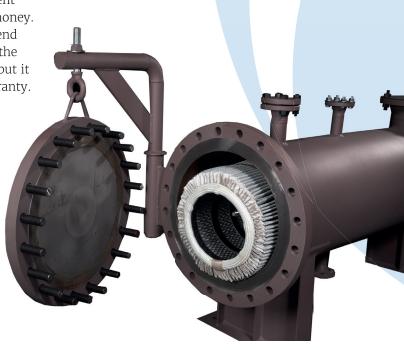



SPEEDEXCELLENCEPARTNERSHIP

ODOLLINGER®

CELEROS FT FACTORY RECOVERY SERVICE

Here's how it works:

- Contact Celeros FT to receive the required authorization to ship us your element for Factory Recovery Service.
- It is preferred that the contaminated filter medium be removed prior to shipping your filter element. Otherwise, the appropriate MSDS must be included with your element so that Celeros FT may remove the medium and safely process it for disposal. Then we inspect the pleat support structure for mechanical integrity.
- Next, the filter medium support structure is mechanically cleaned and any necessary repairs completed.
- Then to protect against corrosion, the entire element support structure is re-coated prior to installing the new Dollinger filter medium.
- Finally, the remaining components of the original filter element, including the fin spacers, backwash screen and flat washers are installed to complete the recovery process

Contact Celeros Flow Technology now to get additional money-saving details about our expert Factory Recovery Service:

Ireland:

P: +353 64 6633322 E: dollinger.sales@celerosft.com

US:

P: +1 800 231 3690 or +1 281 469 0550E: dollinger.america@celerosft.com Asia Pacific: P: +91 141 239 8154 E: dollinger.india@celerosft.com

Middle East: P: +971 4 5289 555

Celeros Flow Technology reserves the right to incorporate our latest design and material changes without notice or obligation. Design features, materials of construction, and dimensional data, as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing. Please contact your local sales representative for product availability in your region. For more information, visit www.celerosft.com.

DL_535_03_FACTREC_GB Version 01/2021 Issued 05/2021 COPYRIGHT © 2021

www.celerosft.com